


OPERATING VOLTAGE: 28 VDC

CURRENT: 50 AMP

INSERTION LOSS (db)

FREQ	CM	DM
10K	8	16
20K	14	24
50K	22	32
100K	30	36
200K	40	44
500K	54	48
1M	60	50
2M	60	50
5M	60	50
10M	60	50
100M	60	50
1G	50	

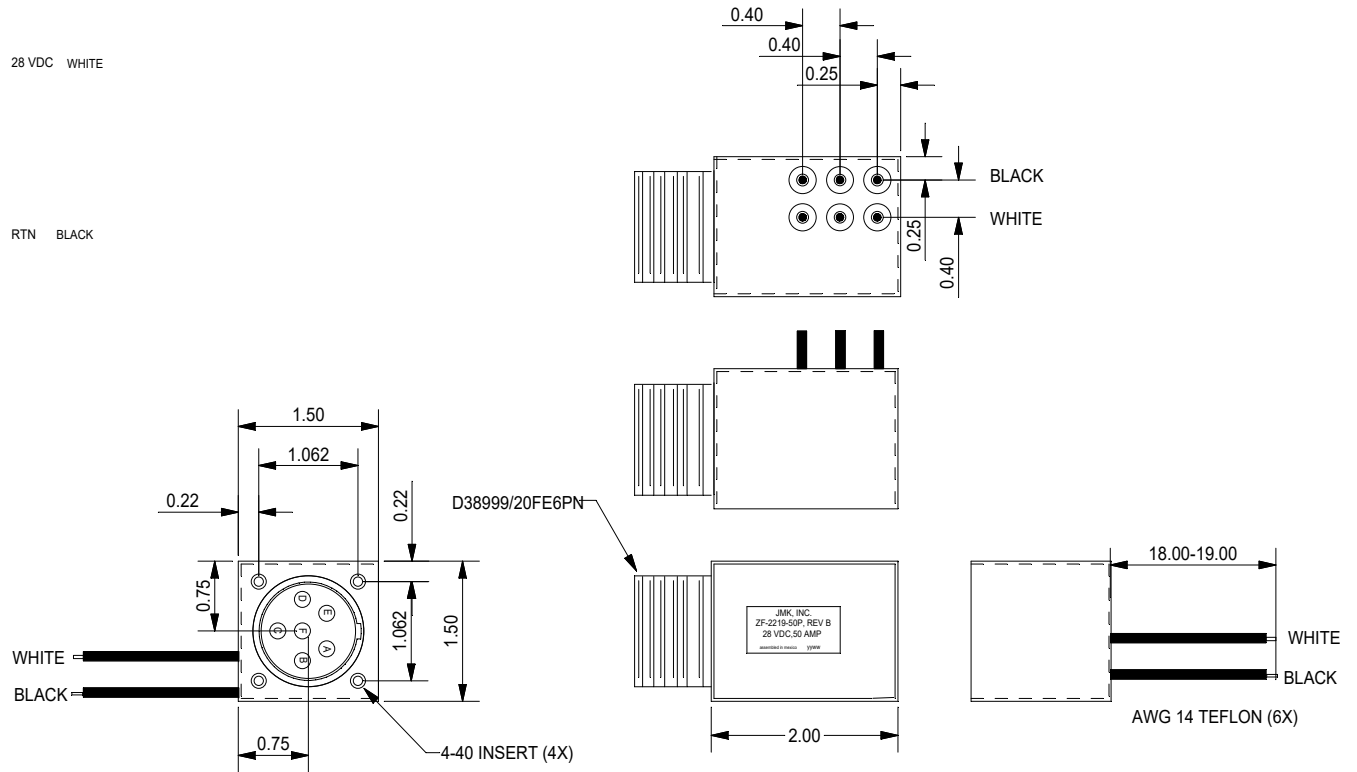

SCALE	APPROVED BY	DRWN BY CYNTHIA GOMEZ
DATE 03/05/15		REV DATE 1/10/17
SPECIFICATION		REVISION C
TOLERANCE .XX = .02 .XXX = .005	DRAWING NO. ZF-2219-50P	
DIM: INCHES (mm)		