






0221 SERIES MILITARIZED

The 221 Series is designed to provide common mode and differential mode filtering for power supply inputs of computer peripheral and other electronic hardware. This militarized version has had its internal components modified to meet the more stringent environmental requirements demanded by the wide range of operating conditions necessary for military equipment.

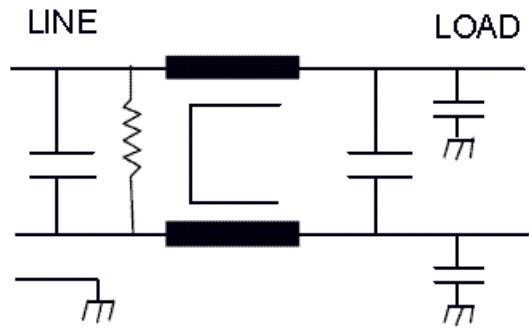

Operating voltage = 115/250 Vac
 Operating current = 1, 2, 3, 5, 10 Amp
 MTBF= 422,726 hours GB
 Operating frequency = DC - 400 Hz
 Operating temperature = -55 to 85 o C
 Storage temperature = -55 to 100 o C
 Diel. withstanding (line - case) = 1500 Vac
 Diel. withstanding (line - line) = 1500 Vdc
 Leakage current = 0.5 ma at 250 Vac, 60 Hz
 Max residual voltage after 1 sec. = 30 Volts
 Agency approvals = UL, CSA
 Hermetically sealed
 Altitude = 70,000 ft
 Terminal pull test = 9 lb
 Temperature cycling = per mil-std-202 method D
 Shock = 15 G per mil-std-202 method A
 Vibration = 10 G per mil-std-202 method A

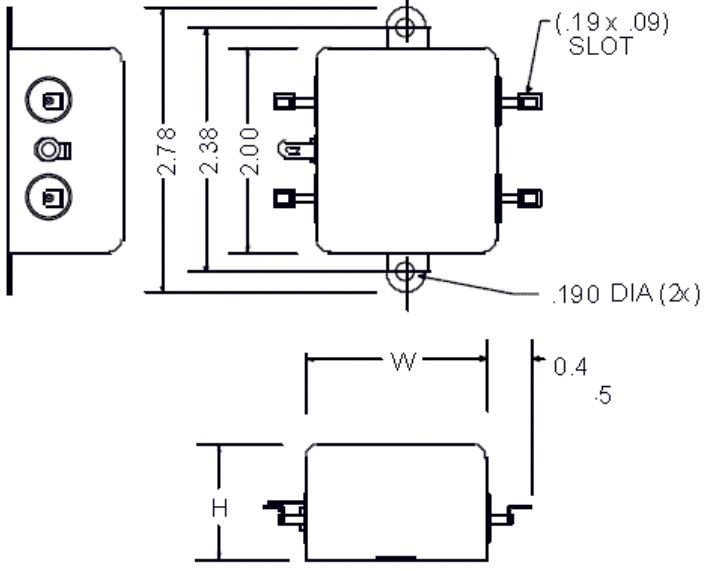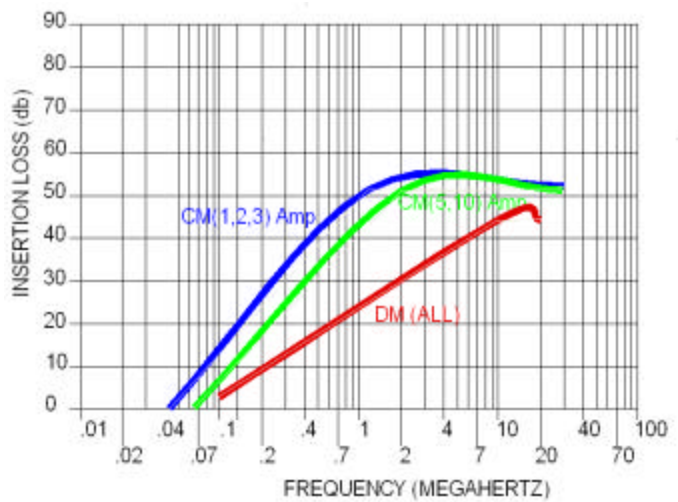

DIMENSION (INCHES)

	H	W
1, 2 AMP	.87	1.75
3, 5 AMP	1.13	1.75
10 AMP	1.13	2.00

Ordering Information

CC-0221-XXM

Use -XX for current rating