





EF-0720-3, 6, 8, 10

Operating Voltage = _____ 115 / 250 V
 Operating Current = _____ 3,6,8,10 Amps
 Operating Frequency = _____ 50 / 60 Hz
 Temperature Range = _____ -20 to 50°C
 Diel. Withstand (L-CASE) = _____ 1500 V; 1 Min
 Diel. Withstand (L-L) = _____ 1500 Vdc; 1 Min
 Leakage Current = _____ 1.0 mA @ 250 V, 60 Hz
 Discharge Volt after 1.0 second = _____ 10 V Max
 Agency approvals = CSA

Calculated MTBF = _____ 18,554,941 Hrs @ 30°C GB

Order P/N: EF-0720-3
 EF-0720-6
 EF-0720-8
 EF-0720-10

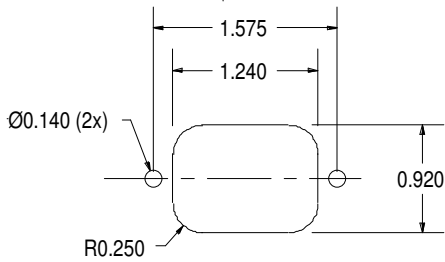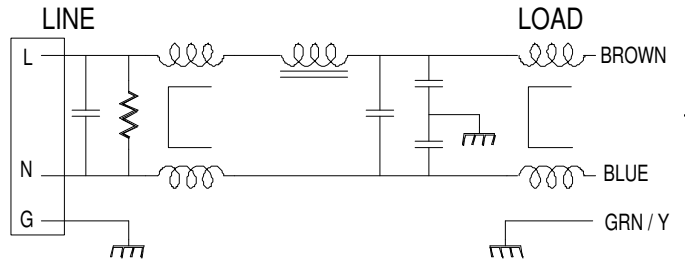

Recommended Cutout
For Mounting

INSERTION LOSS vs. FREQUENCY

