




MM-1244B SERIES

This filter is the same filter as our standard 1244 series except that the enclosure has been modified to use inserts for mounting.

The filter is designed to operate in high current applications of 48 Vdc telecommunication systems and is more than adequate for most installation environments.

Should your application require operation in a more severe environment, JMK's engineering staff can easily modify the mechanical construction to meet the criteria.

Order p/n:
 MM-1244-60B = 60 amp
 MM-1244-85B = 85 amp

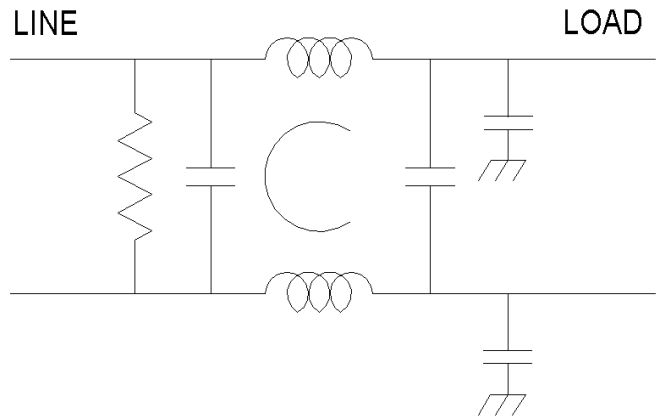

Operating Voltage = _____ 48 Vdc
 Operating Current (Max) = _____ 60, 85 Amp
 Temperature Range (Storage) = _____ -55 to 85 °C
 Temperature Range (Operating) = _____ -20 to 50 °C
 Diel. Withstand Voltage (Term - Case) = _____ 1500 Vdc
 Diel. Withstand Voltage (+ to -) = _____ 707 Vdc

Approvals: CSA- NRTL

