






# HH-2033-15


Operating Voltage = \_\_\_\_\_ 50 Vdc Max  
 Operating Current Max = \_\_\_\_\_ 10 Amp  
 Temperature Operating = \_\_\_\_\_ -40°—85 °C  
 Storage Temperature = \_\_\_\_\_ -40°—100°C  
 DC Resistance per leg = \_\_\_\_\_ 0.008 Ω  
 Calculated MTBF = \_\_\_\_\_ 15,688,735 Hrs @ 30°C GB

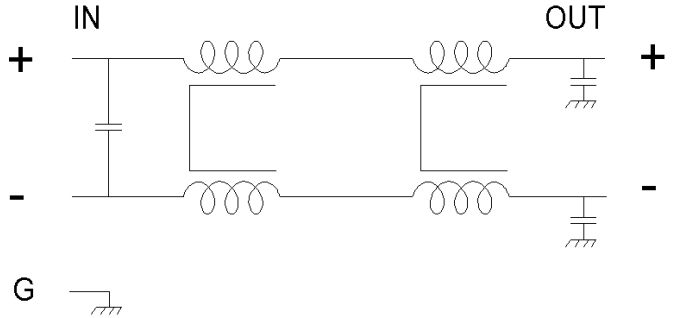




MIL-STD-361F scan w/ R/O SV28-12-20-1

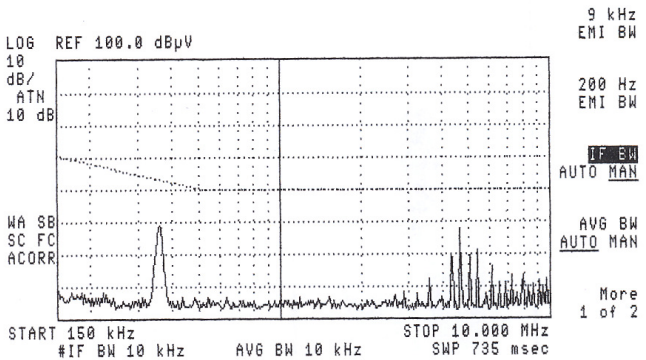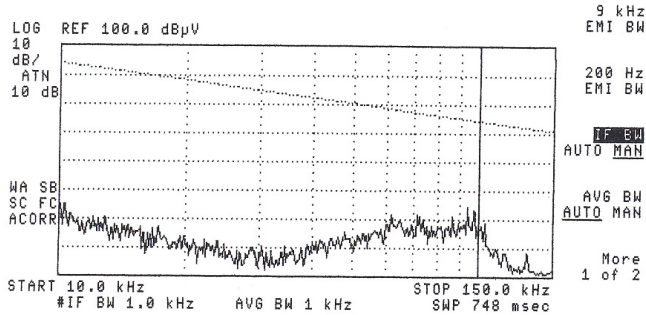

INSERTION LOSS vs. FREQUENCY

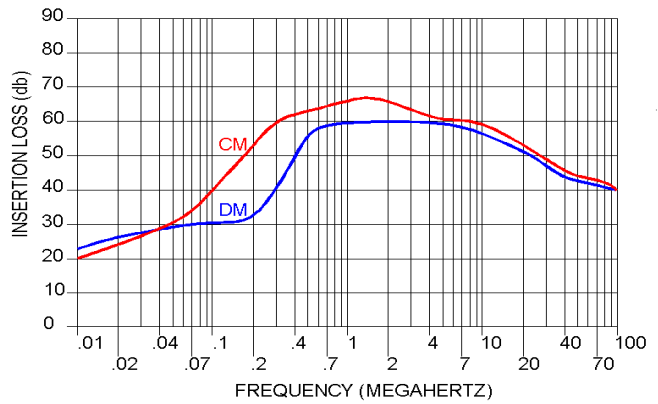

Tolerance: .xx = ± .02  
 .xxx = ± .005

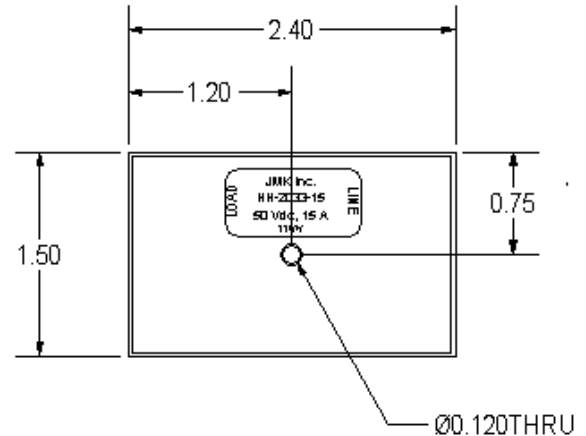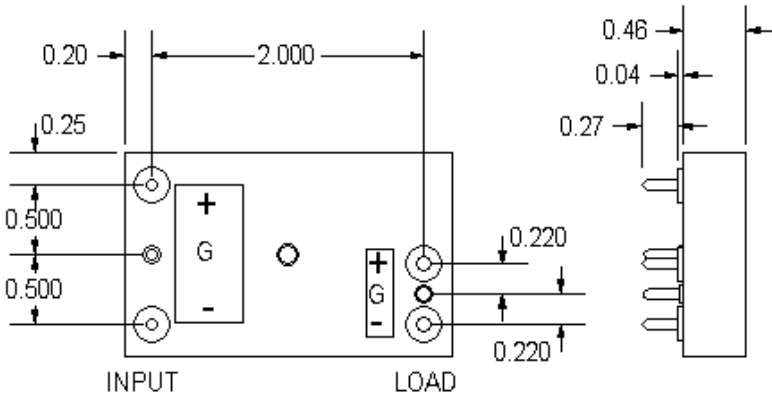

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115  
 email: info@jmkfilters.com  
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884