




OPERATING VOLTAGE: 60V MAX.  
 OPERATING CURRENT: 6.25A MAX.  
 OPERATING TEMP: (-40) TO 50C  
 DIELECTRIC WITHSTAND (L - CASE): 200 V FOR 1 MIN.  
 VARISTOR VOLTAGE: (77 - 90)V

INSERTION LOSS: (db)

FREQ.	CM (db)	DM (db)
10K	6	10
20K	15	16
50K	30	22
100K	42	10
200K	50	42
500K	50	60
1M	50	60
10M	50	
100M	50	
1G	50	

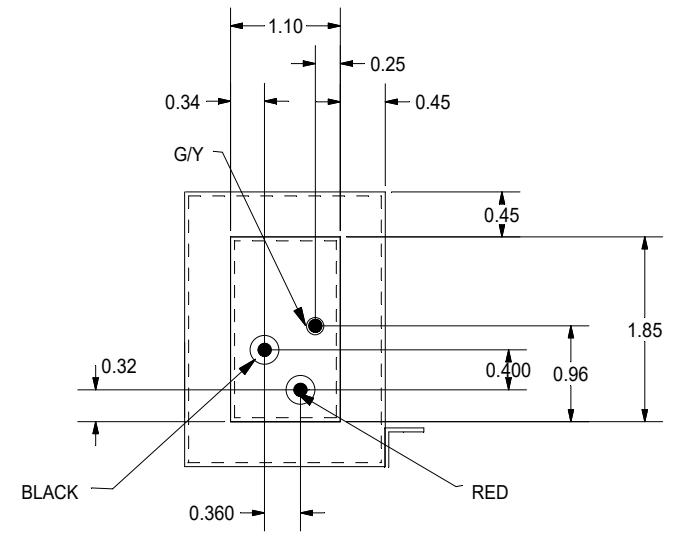

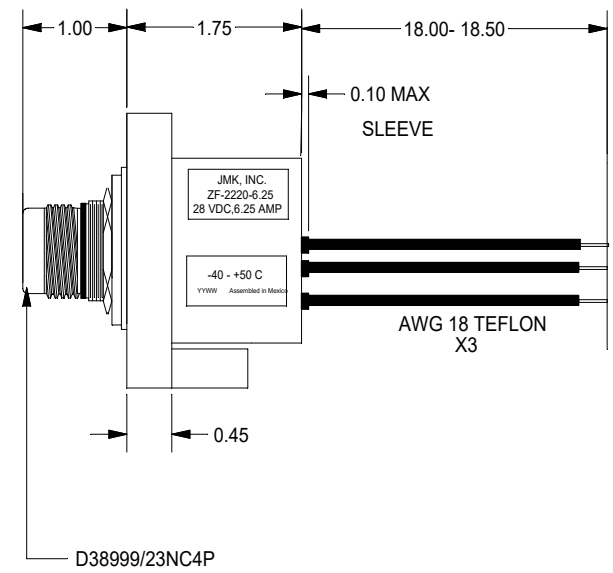

SCALE	APPROVED BY	DRAWN BY	RDW
DATE	7/18/2017	REV DATE	REVISION
<h1>SPECIFICATION</h1>			
TOLERANCE	XX = .02 XXX = .005	DRAWING NO.	ZF-2220- 6.25
DIM: INCHES (mm)			